# AquaLine Tri-Proof

## ATP Series

Robust linear LED tri-proof luminaire engineered for industrial, utility and infrastructure applications requiring reliable protection against dust, moisture and corrosion. The sealed housing, high-efficiency LED system and linkable wiring configuration provide uniform illumination and flexible installation for warehouses, parking areas, plant rooms, tunnels and other demanding environments.



| 45W | 80+ CRI | 50,000h | 130 lm/W |
|---|---|---|---|
| Power | Rendering | Lifespan | Efficacy |

## Technical Specifications


| | |
|---|---|
| Color Temperature | 4000K |
| Input Voltage | 220–240V AC, 50/60Hz |
| Material | PC Body + PC Diffuser |
| Finish | White / Natural PC Finish |
| Mounting | Surface Mounted |
| Operating Temp | -20°C to +50°C |
| Control Options | On/Off, Triac, 1–10V, DALI |
| Accessories | Stainless Steel Mounting Clips, Waterproof Cable Connector |

## Dimensions

Fixture: 1500 × 83 × 68 mm


Beam Angles: 120°

## Dimensions

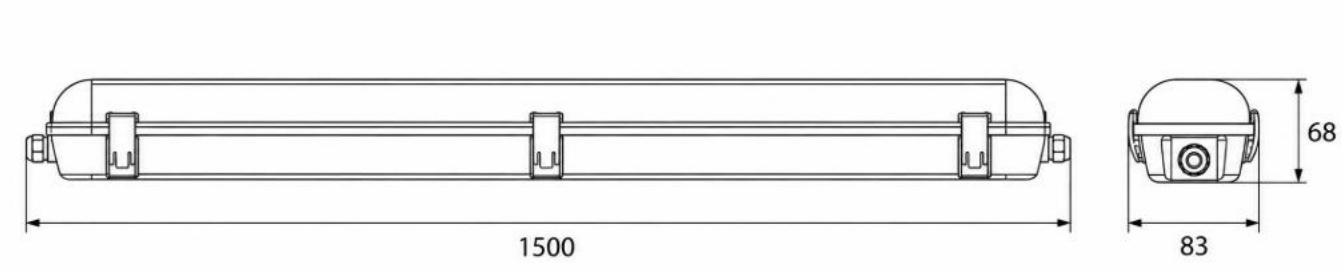


## Light Distribution & Beam diagram

120°

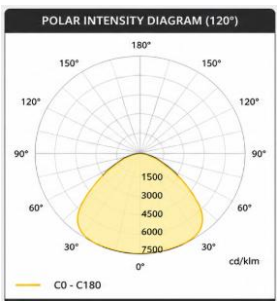


## Ordering Code

| Series | | Body/ Size | | Wattage | | Color Temp | | Beam Angle ° | | Control | | Protection |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| ATP | – | ______ | – | ______ | – | ______ | – | ______ | – | ______ | – | __________ |
| AquaLine Tri-Proof (ATP) | | 1500mm Length | | 45W | | 4000K | | 120° | | DALI | | IP65 |

## Compliance

• CE certified • RoHS compliant • IP65