UrbanBollard 130

BOL Series

Architectural outdoor LED bollard designed for pathways, landscapes, residential developments and public-realm applications. Featuring a robust die-cast and extruded aluminium construction, clear anti-UV optical diffuser and multidirectional light distribution, UrbanBollard 130 delivers uniform illumination with IP65 and IK08 protection for reliable outdoor performance



15W	80+CRI	50,000h	1200 lm
Power	Rendering	Lifespan	Efficacy

Technical Specifications


Color Temperature	3000K
Input Voltage	220–240V AC
Material	Die-cast Aluminium Alloy + Extruded Aluminium Alloy
Finish	Black/ Silver/ RAL 7043/ RAL7016
Mounting	Floor/ Ground Mounted
Operating Temp	-20°C to +50°C
Control Options	On/Off, Triac, 1–10V, DALI
Accessories	Anchor Bolts/ Mounting Base


Dimensions


Fixture: Ø120 × 600 / 800 mm


Beam Angles: Asymmetrical

Dimensions










Light Distribution & Beam diagram

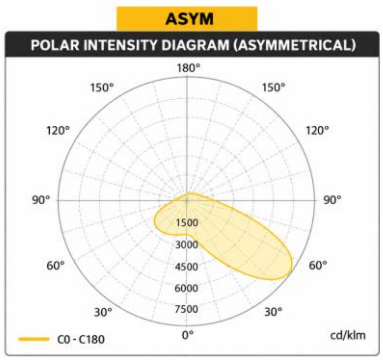

Ordering Code

Series		Body/ Size		Wattage		Color Temp		Beam Angle °		Control		Protection
BOL130	–	______	–	______	–	______	–	______	–	______	–	__________
UrbanBollard 130 (BOL130)		600/ 800 mm Length (060/ 080)		15W		3000K (830)		ASY		DALI		IP65

Compliance

• CE certified • RoHS compliant • IP65 rated • IK08