LineForm 50

LF Series

Slim architectural linear LED luminaire designed for clean, continuous illumination in offices, commercial interiors, retail spaces and contemporary architectural environments. Featuring a precision PC reflector, PMMA lens, low-glare UGR <19 optics and high-efficiency Osram LED technology, LineForm 50 delivers uniform, flicker-free lighting with a refined 50 mm profile



36W	80+CRI	50,000h	120 lm/W
Power	Rendering	Lifespan	Efficacy

Technical Specifications


Color Temperature	4000K
Input Voltage	220–240V AC, 50/60Hz
Material	Aluminium + PC
Finish	Athens White/ Knight Black
Mounting	Suspended/ Surface Mounted
Operating Temp	-20°C to +50°C
Control Options	On/Off, Triac, 1–10V, DALI
Accessories	Suspension Kit


Dimensions

Fixture: 1200 × 50 × 70 mm

Beam Angles: 120°


Dimensions

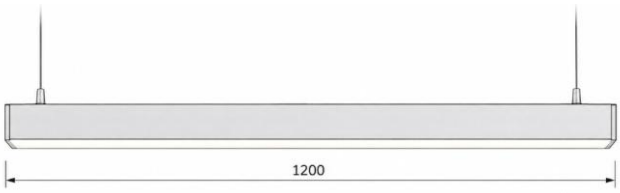





Light Distribution & Beam diagram



Ordering Code

Series		Body/ Size		Wattage		Color Temp		Beam Angle °		Control		Protection
LF50	–	______	–	______	–	______	–	______	–	______	–	__________
LineForm 50 (LF50)		1200 mm Length (1200)		36W		4000K (840)		120°		DALI		IP20

Compliance

• CE certified • IP20