PourDown 119

PDL Series

Architectural recessed LED downlight engineered for deep anti-glare illumination in residential, hospitality and commercial interiors. Featuring a precision ribbed optical system, CRI >90, multiple beam angles and IP44 protection, PourDown 119 delivers controlled, comfortable light with a clean recessed appearance and DALI-compatible control



20W	90CRI	50,000h	100 lm/W
Power	Rendering	Lifespan	Efficacy


Technical Specifications

Color Temperature	3000K
Input Voltage	220–240V AC
Material	Aluminium
Finish	Matt Black / Chrome / Sand Silver / Matt White
Mounting	Ceiling Recessed
Operating Temp	-20°C to +50°C
Control Options	On/Off, Triac, 1–10V, DALI
Accessories	Honeycomb Louver/ BVT Optical Film


Dimensions

Fixture: Ø135 mm x 124 mm H
Cutout: Ø119 mm
Beam Angles: 8° / 12° / 15° / 24° / 36° / 50° / 60°

Dimensions

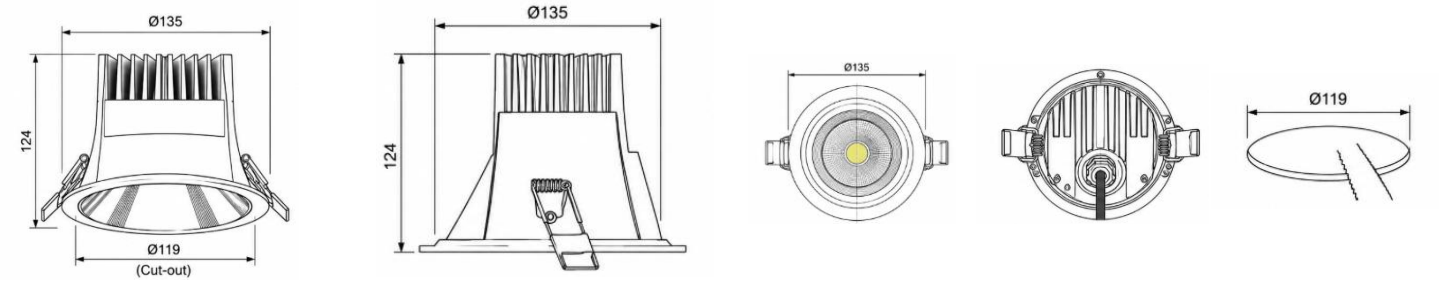

Light Distribution & Beam diagram

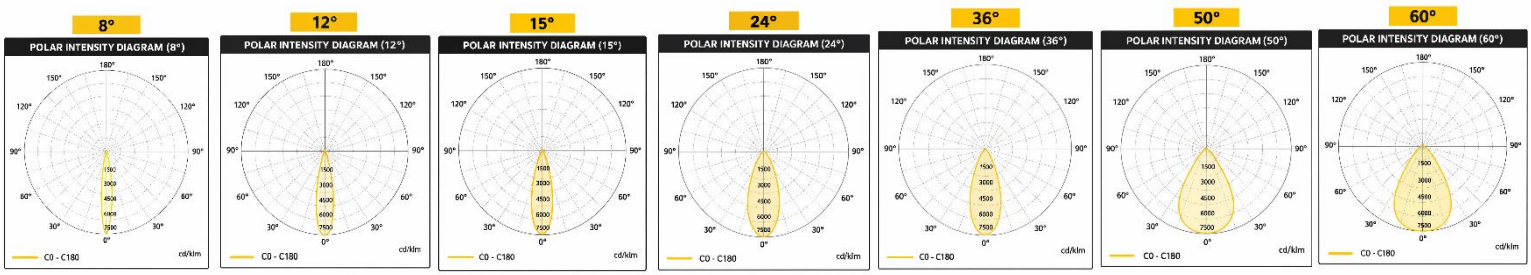

Ordering Code

Series		Body/ Size		Wattage		Color Temp		Beam Angle °		Control		Protection
PDL 119	–	______	–	______	–	______	–	______	–	______	–	__________
PourDown 119 (PDL119)		Ø119 mm Cut-out (119)		20W		3000K (930)		8° 12° 15° 24° 36° 50° 60°		DALI		IP44

Compliance

•IP44 rated • CRI >90 • UGR <13 • DALI-2 compatible