TrimDown IP

TDL Series

Architectural trimless recessed LED downlight designed for seamless integration into ceilings with high visual comfort and precise beam control. Featuring CRI 92, UGR <11, IP65 protection and multiple beam options, TrimDown IP provides refined illumination for hospitality, residential, retail and premium commercial interiors



13W	92CRI	50,000h	1231 lm
Power	Rendering	Lifespan	Efficacy


Technical Specifications

Color Temperature	3000K
Input Voltage	220–240V AC, 350mA
Material	Aluminium Alloy
Finish	Texture White/ Texture Black
Mounting	Trimless Ceiling Recessed
Operating Temp	-20°C to +50°C
Control Options	On/Off, Triac, 1–10V, DALI
Accessories	Remote 350mA LED Power Supply


Dimensions

Fixture: Ø71 mm x 105 mm H
Cutout: Ø90 mm
Beam Angles: 15° / 24° / 36° / 55°

Dimensions

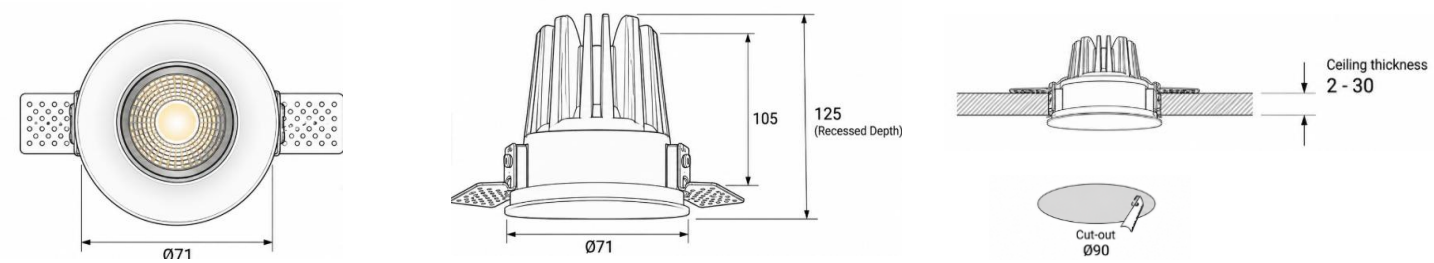

Light Distribution & Beam diagram

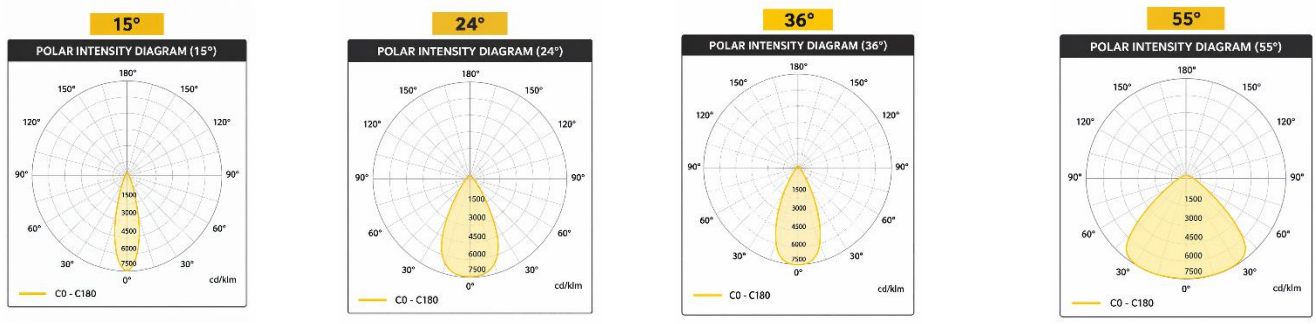

Ordering Code

Series		Body/ Size		Wattage		Color Temp		Beam Angle °		Control		Protection
TDL	–	______	–	______	–	______	–	______	–	______	–	__________
TrimDown (TDL)		Ø90 mm Cut-out (090)		13W		3000K (930)		15° 24° 36° 55°		DALI		IP65

Compliance

• CE certified • LVD • RoHS • IP65 rated